

# 4015


## SITE SPECIFICATIONS

- **BAY HEIGHT:** 78" rise plus vehicle
- **BAY WIDTH:** 12' recommended
- **BAY DEPTH:** 24' recommended / 26' rec. for extended models
- **POWER REQ.:** 208-230v Single Phase\*, 30-amp breaker
- **MIN. CONCRETE SPEC:** 4" thick, reinforced, free from cracks/seams, rated at 3500+ psi, cured at least 28 days
- **AIR REQUIRED:** 90-120 psi



## SERVICE BAY LAYOUT

4015 EFO/XFO shown

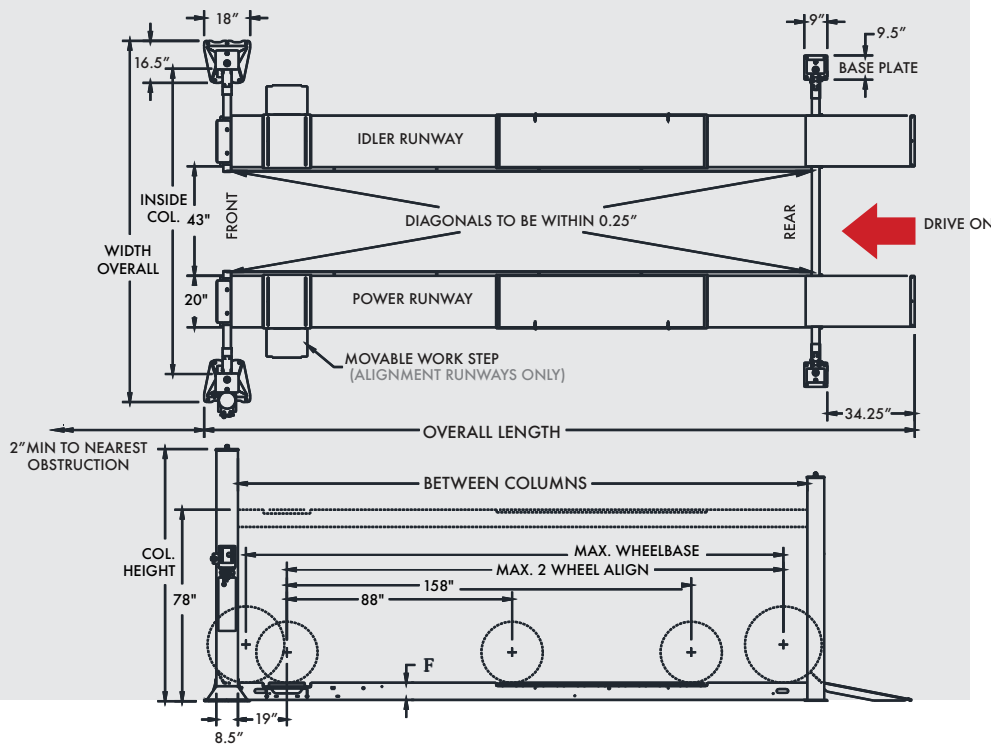

Model Number	4015EFO	4015XFO	4015EFX	4015XFX
Lifting Capacity	15,000 lbs.			
Front	Open		Closed	
Max. Wheelbase	182.5"	210"	182.5"	210"
Rise Height	78"			
Overall Length	250.25"	277.25"	245.75"	273.25"
Overall Width	142" front / 134.25" rear		134.5"	
Inside Columns	120"			
Between Columns	195"	222.5"	196"	223.5"
Height of Columns	99.5" front / 93.5" rear		93.5"	
Width of Runways	20"			
Height of Runways	7"			
Width Btw. Runways	43"		40" / 43"	
Air Supply Required	90-120 psi			
Motor / Voltage	2HP, 208v-230v, 60Hz, 1Ph			
Speed or Rise	85 s			
Min. Recomm. Bay Size	12' x 24'	12' x 26'	12' x 24'	12' x 26'
ALI/ETL Certified	√	√	√	√
Colors Available				

\*3-phase upgrade is available for purchase

www.challengerlifts.com  
1-800-648-5438